




Small Signal Zener Diode



SOT-323

Features

- Epoxy meets UL-94 V-0 flammability rating and halogen free
- Moisture Sensitivity Level 1
- Zener Voltage 2.4V~39V
- V_Z -tolerance for both diodes in one case is $\leq 5\%$
- Part no. with suffix "Q" means AEC-Q101 qualified

Applications

- General regulation functions

Mechanical Data

- **Case:** SOT-323
- **Terminals:** Tin plated leads, solderable per J-STD-002 and JESD22-B102

■ Limiting Values (Absolute Maximum Rating, $T_A=25^\circ\text{C}$ Unless otherwise specified)

Characteristic	Symbol	Value	Units
Power Dissipation	$P_D^{[1]}$	200	mW
Maximum Forward Voltage ($I_F=10\text{mA}$)	V_F	0.9	V
Maximum Regulator Current	$I_{ZM}^{[1]}$	P_D / V_Z	mA
Thermal Resistance from Junction to Ambient	$R_{\theta JA}$	625	$^\circ\text{C/W}$
Storage Temperature Range	T_{STG}	-55~+150	$^\circ\text{C}$
Operation Temperature	T_J	-55~+150	$^\circ\text{C}$

[1] Single diode loaded

■ Ordering Information (Example)

PREFERRED P/N	PACKING CODE	UNIT WEIGHT(g)	MINIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE
AZ23C2V4WQ THRU AZ23C39WQ	F2	Approximate 0.006	3000	30000	120000	7" reel



AZ23C2V4WQ THRU AZ23C39WQ


RoHS
COMPLIANT

■Electrical Characteristics (T_a=25°C Unless otherwise specified)

Type Number	Device Marking	V _z at I _{zt} (V)			I _{zt} mA	Z _{zt} (Ω)		Z _{zk} (Ω)		I _R (μA)@V _R		Typical Temperature Coefficient@ I _{ZTC} mV/°C		Test Current I _{ZTC} mA
		min.	typ.	max.		I _{zk} (mA)	max.	I _{zk} (mA)	max.	uA	V _R (V)	Min.	Max.	
AZ23C2V4WQ	KD0	2.28	2.4	2.56	5	5	100	1.0	600	50	1.0	-3.5	0	5
AZ23C2V7WQ	KD1	2.5	2.7	2.9	5	5	100	1.0	600	20	1.0	-3.5	0	5
AZ23C3V0WQ	KD2	2.8	3.0	3.2	5	5	95	1.0	600	10	1.0	-3.5	0	5
AZ23C3V3WQ	KD3	3.1	3.3	3.5	5	5	95	1.0	600	5	1.0	-3.5	0	5
AZ23C3V6WQ	KD4	3.4	3.6	3.8	5	5	90	1.0	600	5	1.0	-3.5	0	5
AZ23C3V9WQ	KD5	3.7	3.9	4.1	5	5	90	1.0	600	3	1.0	-3.5	0	5
AZ23C4V3WQ	KD6	4.0	4.3	4.6	5	5	90	1.0	600	3	1.0	-3.5	0	5
AZ23C4V7WQ	KD7	4.4	4.7	5.0	5	5	80	1.0	500	3	2.0	-3.5	0.2	5
AZ23C5V1WQ	KD8	4.8	5.1	5.4	5	5	60	1.0	480	2	2.0	-2.7	1.2	5
AZ23C5V6WQ	KD9	5.2	5.6	6.0	5	5	40	1.0	400	1	2.0	-2	2.5	5
AZ23C6V2WQ	KDA	5.8	6.2	6.6	5	5	10	1.0	150	3	4.0	0.4	3.7	5
AZ23C6V8WQ	KDB	6.4	6.8	7.2	5	5	15	1.0	80	2	4.0	1.2	4.5	5
AZ23C7V5WQ	KDC	7.0	7.5	7.9	5	5	15	1.0	80	1	5.0	2.5	5.3	5
AZ23C8V2WQ	KDD	7.7	8.2	8.7	5	5	15	1.0	80	0.7	5.0	3.2	6.2	5
AZ23C9V1WQ	KDE	8.5	9.1	9.6	5	5	15	1.0	100	0.5	6.0	3.8	7.0	5
AZ23C10WQ	KDF	9.4	10	10.6	5	5	20	1.0	150	0.2	7.0	4.5	8.0	5
AZ23C11WQ	KDG	10.4	11	11.6	5	5	20	1.0	150	0.1	8.0	5.4	9.0	5
AZ23C12WQ	KDH	11.4	12	12.7	5	5	25	1.0	150	0.1	8.0	6.0	10.0	5
AZ23C13WQ	KDI	12.4	13	14.1	5	5	30	1.0	170	0.1	8.0	7.0	11.0	5
AZ23C15WQ	KDJ	13.8	15	15.6	5	5	30	1.0	200	0.1	10.5	9.2	13.0	5
AZ23C16WQ	KDK	15.3	16	17.1	5	5	40	1.0	200	0.1	11.2	10.4	14.0	5
AZ23C18WQ	KDL	16.8	18	19.1	5	5	45	1.0	225	0.1	12.6	12.4	16.0	5
AZ23C20WQ	KDM	18.8	20	21.2	5	5	55	1.0	225	0.1	14.0	14.4	18.0	5
AZ23C22WQ	KDN	20.8	22	23.3	5	5	55	1.0	250	0.1	15.4	16.4	20.0	5
AZ23C24WQ	KDO	22.8	24	25.6	5	5	70	1.0	250	0.1	16.8	18.4	22.0	5
AZ23C27WQ	KDP	25.1	27	28.9	2	2	80	0.5	300	0.1	18.9	21.4	25.3	2
AZ23C30WQ	KDQ	28	30	32	2	2	80	0.5	300	0.1	21.0	24.4	29.4	2
AZ23C33WQ	KDR	31	33	35	2	2	80	0.5	325	0.1	23.1	27.4	33.4	2
AZ23C36WQ	KDS	34	36	38	2	2	90	0.5	350	0.1	25.2	30.4	37.4	2
AZ23C39WQ	KDT	37	39	41	2	2	130	0.5	350	0.1	27.3	33.4	41.2	2



■ Characteristics (Typical)

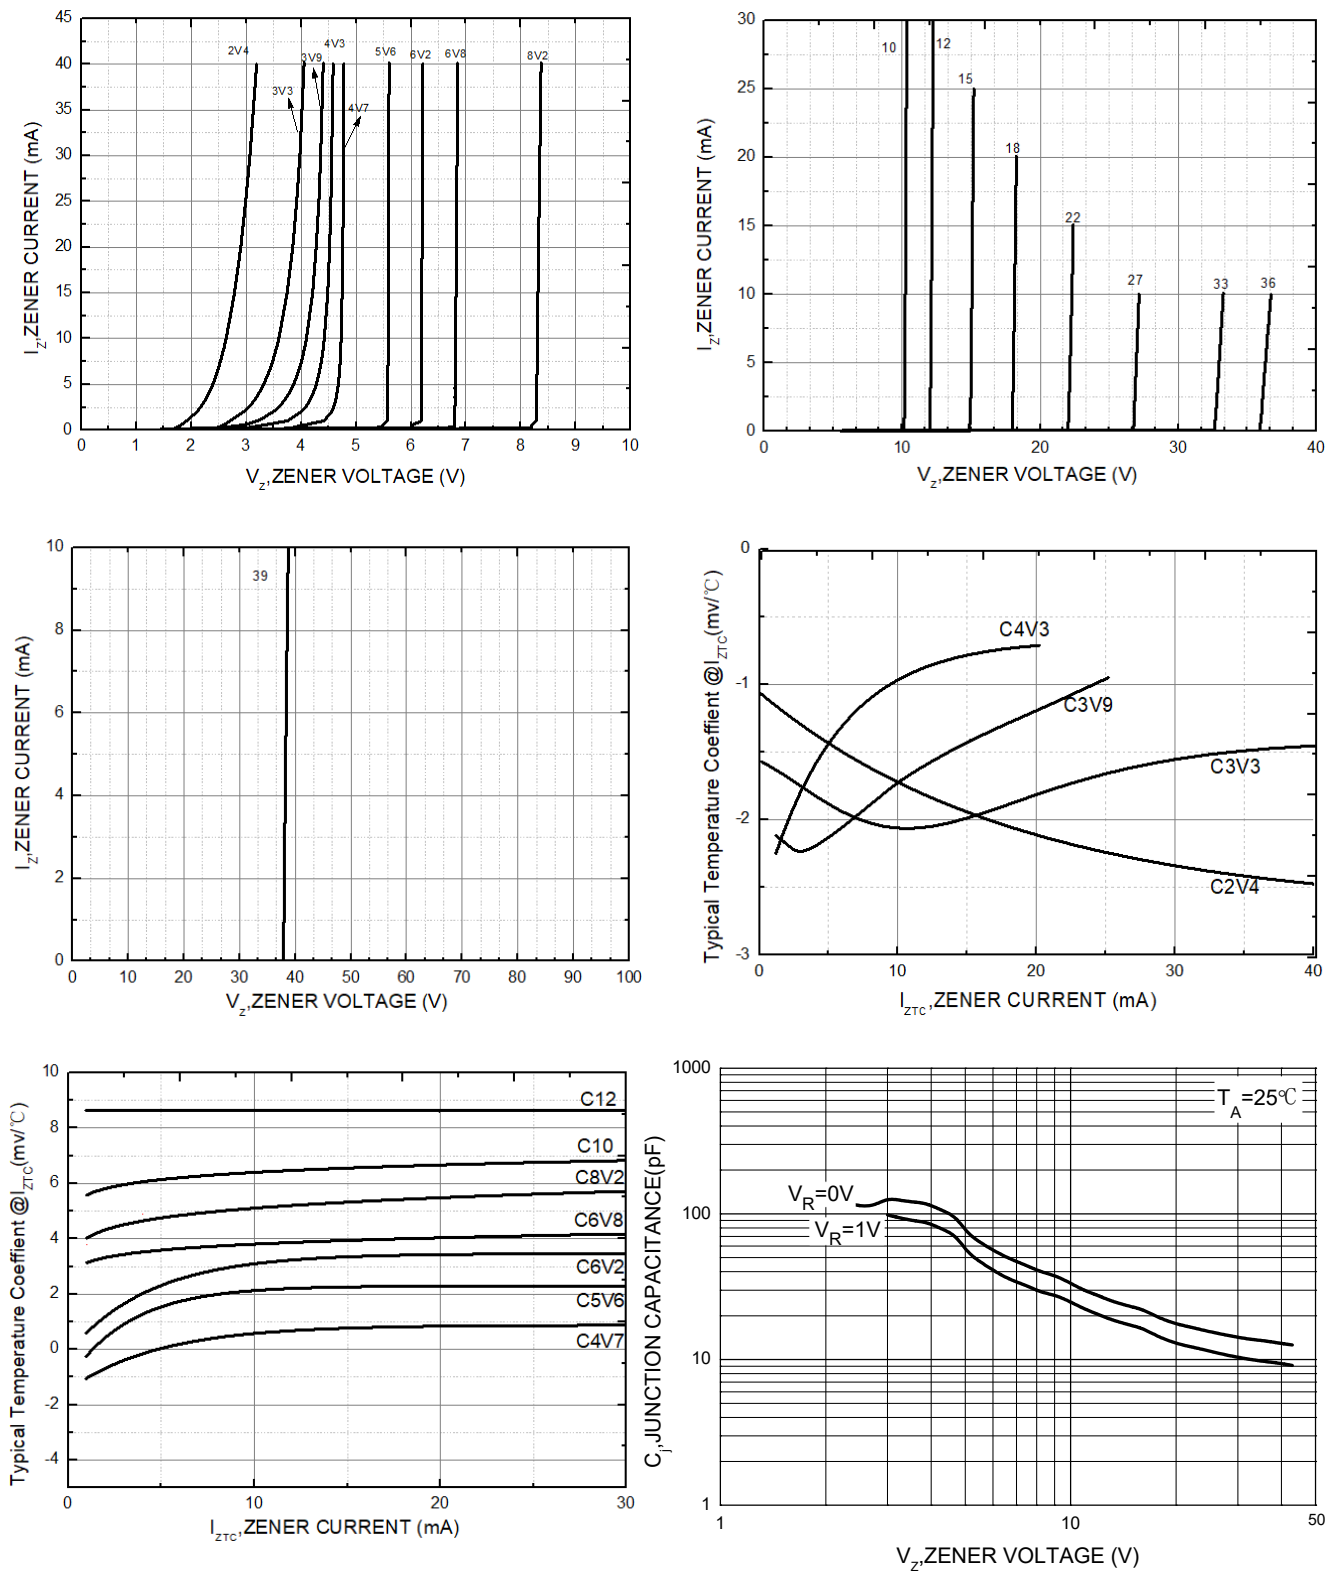





AZ23C2V4WQ THRU AZ23C39WQ

RoHS
COMPLIANT


■ Outline Dimensions




TOP VIEW

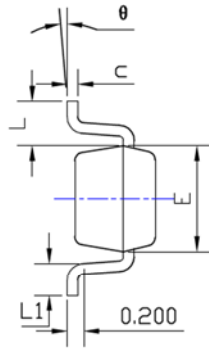

SIDE VIEW



SIDE VIEW



UNIT: mm

SUGGESTED SOLDER PAD LAYOUT

SYMBOL	DIMENSIONS			
	INCHES		Millimeter	
	MIN.	MAX.	MIN.	MAX.
A	0.035	0.043	0.900	1.100
A1	0.000	0.004	0.000	0.100
A2	0.035	0.039	0.900	1.000
b	0.006	0.016	0.150	0.400
c	0.004	0.010	0.100	0.250
D	0.071	0.087	1.800	2.200
E	0.045	0.053	1.150	1.350
E1	0.085	0.096	2.150	2.450
e	0.026TYP		0.650TYP	
e1	0.047	0.055	1.200	1.400
L	0.021REF		0.525REF	
L1	0.010	0.018	0.260	0.460
θ	0°	8°	0°	8°

NOTE:

- 1.PACKAGE BODY SIZES EXCLUDE MOLD FLASH AND GATE BURRS.
- 2.TOLERANCE 0.1mm UNLESS OTHERWISE SPECIFIED.
- 3.THE PAD LAYOUT IS FOR REFERENCE PURPOSES ONLY.



Disclaimer

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with automotive electronics, are not esigned for use in medical, life-saving, lifesustaining, or military, Yangjie or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website [http:// www.21yangjie.com](http://www.21yangjie.com) , or consult your nearest Yangjie's sales office for further assistance.